
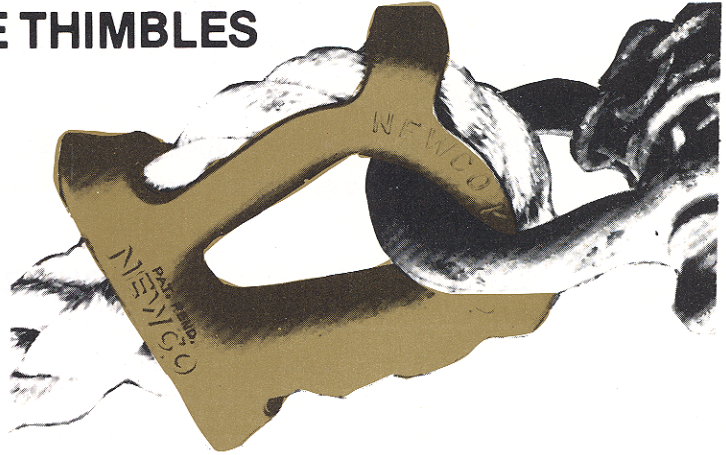




BRONZE ROPE THIMBLES

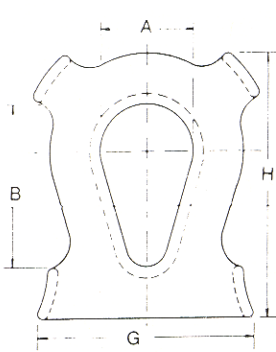

NEWCO BRONZE ROPE THIMBLES are made of nickle aluminum bronze alloy which has tesile strength of 90,000 P.S.I. They are ideal for marine applications as the Bronze Alloy is non-corrosive in formula, as well as being non-sparking. This rope thimble was developed primarily for use with nylon, manila, polypropylene, and polyvinyl chloride ropes. Four (4) rings or "Keepers" prevent rope from jumping out of the thimble. 17 sizes are available in rope diameter size from 3/8" to 5".

Assigned Federal Stock Numbers:

1 1/8-1 1/4	—	FSN-KZ4030-814-5781
1 1/2-1 3/4	—	FSN-KZ4030-814-5790
2-2 1/4	—	FSN-KZ4030-814-5794
2 1/2-2 3/4	—	FSN-KZ4030-814-5825
3	—	FSN-KZ4030-814-5827
3 1/2-3 3/4	—	FSN-KZ4030-814-5831
4	—	FSN-KZ4030-814-5847
5	—	FSN-KZ4030-814-5851
7	—	FSN-KZ4030-814-5857
9	—	FSN-KZ4030-814-5860

Canadian Patent No. 707.480

MIL-T-23326(SHIPS)

DIMENSIONS & DATA

Rope Circum.	Rope Dia.	A	B	C	D	G	H	T	Shackle Size	Est. Wt. Lbs.
1 1/8-1 1/4	3/8-7/16	7/8	1 1/2	9/16	3/4	2 1/16	2 7/16	3/32	3/8	.20
1 1/2-1 3/4	1/2-9/16	1	1 5/8	11/16	29/32	2 3/8	2 13/16	7/64	3/8	.36
2-2 1/4	5/8-3/4	1 1/8	2	7/8	1 1/8	3 1/8	3 1/2	1/8	1/2	.60
2 1/2-2 3/4	13/16-15/16	1 1/4	2 5/16	1 1/16	1 3/8	3 3/4	4 3/16	5/32	5/8	.90
3	1	1 5/8	2 3/4	1 3/16	1 9/16	4 1/4	4 11/16	3/16	3/4	1.6
3 1/2-3 3/4	1 1/8-1 1/4	1 7/8	3 3/16	1 7/16	1 27/32	5 1/16	5 3/16	13/64	7/8	2.1
4	1 5/16	2 1/8	3 5/8	1 1/2	1 15/16	5 1/2	5 13/16	7/32	7/8	2.6
4 1/2	1 1/2	2 3/8	4 1/16	1 11/16	2 5/32	6 1/4	6 1/2	15/64	1	3.7
5	1 5/8	2 5/8	4 1/2	1 13/16	2 5/16	6 3/4	7 1/16	1/4	1 1/8	4.8
5 1/2	1 3/4	2 7/8	4 15/16	2	2 17/32	7 3/8	7 3/4	17/64	1 1/4	6.8
6	2	3 1/8	5 3/8	2 1/4	2 13/16	8 3/8	8 5/8	9/32	1 1/4	7.7
6 1/2	2 1/8	3 1/2	5 13/16	2 3/8	2 31/32	9	9 1/8	19/64	1 3/8	9.5
7	2 1/4	3 7/8	6 1/4	2 1/2	3 1/8	9 3/8	9 5/8	5/16	1 1/2	11
8	2 5/8	4 3/8	7	2 7/8	3 5/8	10 5/8	10 3/4	3/8	1 5/8	16.5
9	3	4 7/8	8	3 1/4	4 1/8	11 3/4	12 1/8	7/16	2	25
10	3 1/4	5 3/8	9 1/4	3 1/2	4 1/2	13 1/8	13 7/8	1/2	2	38
12	3 3/4	6	10	4	5 3/8	14 5/8	15 1/2	11/16	-	60
15-16	4 3/4-5	9	12 1/2	6 3/8	8 3/8	22 7/8	21 1/2	1	-	225

Dimensions are approximate-within standard foundry practice