
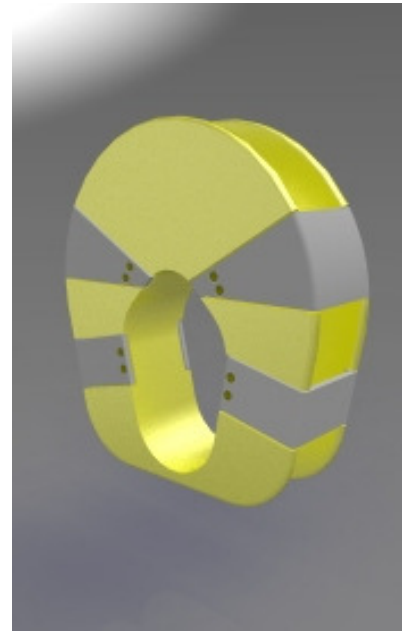


WORKHORSE SRT

Synthetic Rope Thimble

- Individually traceable
- MBL exceeds corresponding diameter HMPE ropes
- 100% rope protection at eye
- Detachable clips = inserts into existing eyes
- 3:1 D/d ratio maximizes grommet strength

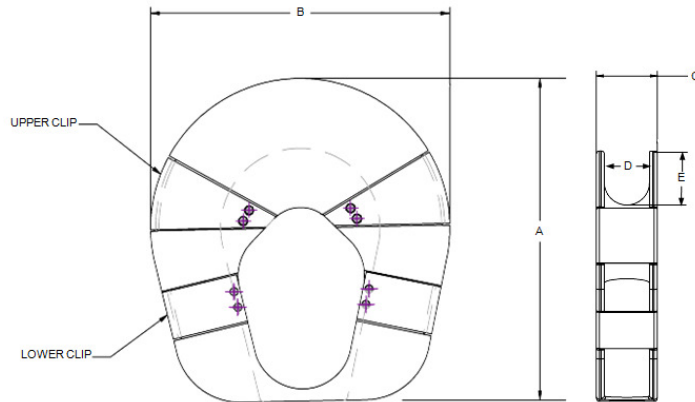

Rope Diameter * (inches)		Min Breaking Load Limit (Tons)	Dimensions in Inches					Weight (lbs) **
From	To		A	B	C	D	E	
1.500	2.000	355.0	12.339	11.550	3.450	2.200	2.775	26
2.000	2.500	522.4	14.556	14.250	4.000	2.750	3.375	56
2.500	3.000	732.0	17.333	16.950	4.550	3.300	3.975	99
2.750	3.250	874.8	19.723	18.300	4.825	3.575	4.275	133
3.000	3.500	1038.8	21.207	20.325	5.238	3.850	4.725	176
3.500	4.000	1246.5	23.184	22.350	5.650	4.400	5.175	230
4.000	4.500	1631.3	25.658	25.725	6.338	4.950	5.925	323
4.500	5.000	1884.7	28.199	27.750	6.750	5.500	6.375	400

* Additional sizes available on request

** Wgt identified is handling wgt w/o upper and lower clips. Average clip wgt = 5 lbs

Rope Diameter * (millimeters)		Min Breaking Load Limit (Tonnes)	Dimensions in Millimeters					Weight (kgs) **
From	To		A	B	C	D	E	
38	51	322.1	313	293	88	56	70	12
51	64	474.0	370	362	102	70	86	25
64	76	664.0	440	431	116	84	101	45
70	83	793.6	501	465	123	91	109	60
76	89	942.4	539	516	133	98	120	80
89	102	1130.8	589	568	144	112	131	104
102	114	1479.9	652	653	161	126	150	147
114	127	1709.8	716	705	171	140	162	181

* Additional sizes available on request

* Wgt identified is handling wgt w/o upper and lower clips. Average clip wgt = 5 lbs

Made in USA