
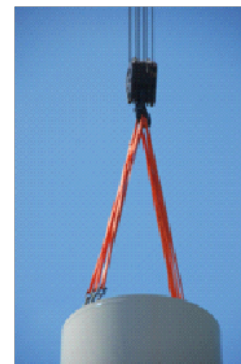


UNITEX™ ENDLESS POLYESTER ROUND SLINGS

FEATURES AND BENEFITS:

- Endless configuration allows wear points to be shifted, extending sling life
- Lightweight and flexible for easy rigging and storage
- Sling conforms to load and endless design allows sling to be spread, increasing load stability
- Sling provides a tight choke with an easy release
- Resists moisture absorption, rot and mildew
- Reduces risk of back, shoulder and hand injuries
- Seamless double-wall cover helps protect load-carrying yarns from UV degradation
- Color coded for easy identification
- Protected tag feature helps protect tag from illegibility
- Individually serialized for traceability
- Highest capacities per color in the industry



CAPACITY CHART AND SPECIFICATIONS


**All capacities listed below meet or exceed all applicable US industry standards having a 5:1 design factor*

Code	Color	Rated Capacity (lbs)			Minimum Length (ft)	Relaxed Body Dia. (in)	Sleeve Width (in)	Approx. Weight (lbs/ft)
		Vertical WLL	Choker WLL	Basket WLL				
ENR-3000	Purple	3,000	2,400	6,000	3	5/8	1-1/2	0.3
ENR-6000	Green	6,000	4,800	12,000	3	7/8	1-3/4	0.4
ENR-9000	Yellow	9,000	7,200	18,000	3	1-1/8	2-1/8	0.6
ENR-12000	Tan	12,000	9,600	24,000	3	1-1/4	2-1/8	0.7
ENR-14000	Red	14,000	11,200	28,000	3	1-1/2	2-11/16	0.8
ENR-17000	White	17,000	13,600	34,000	3	1-5/8	2-7/8	0.9
ENR-23000	Blue	23,000	18,400	46,000	4	1-7/8	3-1/2	1.6
ENR-31000	Orange	31,000	24,800	62,000	4	2-3/4	4-23/32	2.0

**Import slings manufactured by Unitex Safety Equipment (Kunshan, China). Stock lengths are (3ft), 4ft thru 20ft (even lengths).*

**Domestic slings manufactured by Unitex Group USA, LLC (Piedmont, SC). Slings are made to order up to 40ft in length.*

HOW TO ORDER INSTRUCTIONS = CODE – LENGTH *for Domestic product = CODE – LENGTH - D

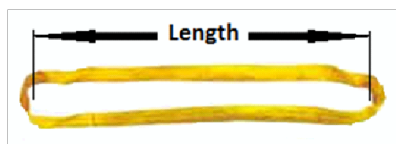

SLING FAILURE CAN CAUSE DEATH OR INJURY RESULTING FROM MISUSE, DAMAGE AND EXCESSIVE WEAR
ADHERE TO INDUSTRY STANDARDS AND REGULATIONS