

ULTRALIFT by **UNITEX™ (ULLD)**

Heavy lift round slings that offer maximum strength combined with minimum weight

FEATURES AND BENEFITS:

SUPERIOR STRENGTH – ULTRALIFT® ULLD slings are made with Dyneema®, the world's strongest fiber

ERGONOMIC - ULTRALIFT® ULLD slings are very light weight, approximately 85% lighter than conventional steel slings with the same capacity, and are very pliable making them easy to use

SUPERIOR CYCLE LIFE – ULTRALIFT® ULLD slings do not get fatigued after prolonged and excessive use like steel slings

SUPERIOR DURABILITY - ULTRALIFT® ULLD slings are resistant to extreme abrasion, have cut resistant properties and can be also used with small pin diameters without a major loss in efficiency

ELIMINATE DAMAGE - ULTRALIFT® ULLD slings will not gouge steel pick points or damage the load

SUPERIOR SAFETY BENEFITS - ULTRALIFT® ULLD slings will reduce loss time accidents due to shoulder, back and hand injuries working with heavy steel slings

CLEAR INSPECTION & DISCARD CRITERIA - ULTRALIFT® ULLD slings have red warning yarns inside the sling cover to assist in the inspection process

LOW ENLARGEMENT - ULTRALIFT® ULLD slings have less than 1% stretch at working load making it easy to replace only one sling in a set


REPAIRABLE – The outer covers of ULTRALIFT® ULLD slings can be easily repaired and put back into service

SUPERIOR RESISTANCE TO HARSH ENVIRONMENTS – ULTRALIFT® ULLD slings are buoyant, resistant to moisture, most chemicals and UV light



ULTRALIFT by UNITEX™ (ULLD)

Heavy lift round slings that offer maximum strength combined with minimum weight

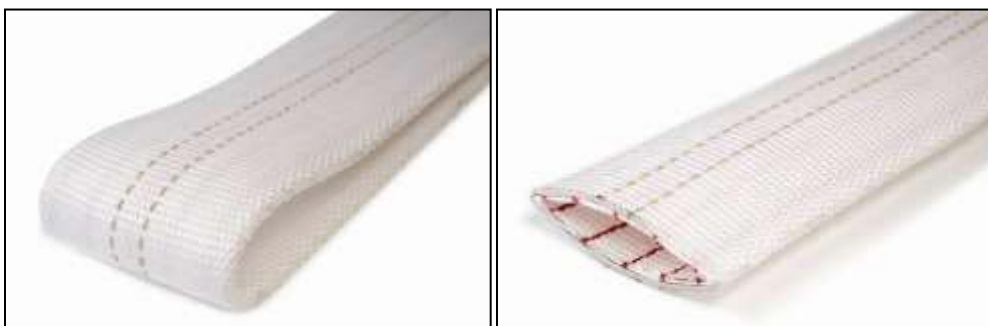

Dyneema® is a registered trademark of Royal DSM N.V.

CAPACITY CHART AND SPECIFICATIONS

**All capacities listed below meet or exceed all applicable US industry standards having a 5:1 design factor*

Code	Color	Vertical 	Choker 	Basket 	Minimum Length (ft)	Core Dia. (in)	Sleeve Width (in)	Approx. Weight (lbs/ft)
		WLL	WLL	WLL				
ULLD25000	White	25,000	20,000	50,000	6	0.94	3.27	0.82
ULLD40000	White	40,000	32,000	80,000	6	1.18	3.86	1.05
ULLD55000	White	55,000	44,000	110,000	6	1.34	3.86	1.19
ULLD70000	White	70,000	56,000	140,000	6	1.57	5.24	1.55
ULLD80000	White	80,000	64,000	160,000	6	1.73	5.24	1.72
ULLD105000	White	105,000	84,000	210,000	6	1.89	5.24	1.88
ULLD130000	White	130,000	104,000	260,000	8	2.80	7.20	3.27
ULLD160000	White	160,000	128,000	320,000	8	2.95	7.20	3.54
ULLD180000	White	180,000	144,000	360,000	8	3.43	7.20	4.34
ULLD205000	White	205,000	164,000	410,000	8	3.54	8.39	4.73
ULLD235000	White	235,000	188,000	470,000	8	3.70	8.98	5.13
ULLD260000	White	260,000	208,000	520,000	10	3.94	8.98	6.91
ULLD310000	White	310,000	248,000	620,000	10	4.25	11.14	7.85
ULLD360000	White	360,000	288,000	720,000	10	4.57	13.50	8.73
ULLD410000	White	410,000	328,000	820,000	10	4.92	13.50	9.97
ULLD460000	White	460,000	368,000	920,000	10	5.20	13.50	10.83
ULLD500000	White	500,000	400,000	1,000,000	10	5.48	13.50	11.71



WARNING

**SLING FAILURE CAN CAUSE DEATH OR INJURY RESULTING FROM MISUSE, DAMAGE AND EXCESSIVE WEAR
ADHERE TO INDUSTRY STANDARDS AND REGULATIONS**